

DRY PRESSURE GAUGES



- Dry Gauge • Steel Case • Accuracy: 3% -2% -3% • Window: Glass • Connection: Brass • Bourdon Tube
- Operating Temperature: -40°F To +140°F, -40°C To +60°C



1/4 M.P.T. STEM MOUNT

PART No.	Dial	Range	
	(IN.)	(P.S.I.)	(kPa)
PG-100SD15	1.5	0-100	N/A
PG-160SD15	1.5	0-160	N/A
PG-15SD2	2	0-15	N/A
PG-30SD2	2	0-30	N/A
PG-60SD2	2	0-60	N/A
PG-100SD2	2	0-100	N/A
PG-160SD2	2	0-160	N/A
PG-200SD2	2	0-200	N/A
PG-300SD2	2	0-300	N/A
PG-15SD25	2.5	0-15	0-100
PG-30SD25	2.5	0-30	0-200
PG-60SD25	2.5	0-60	0-400
PG-100SD25	2.5	0-100	0-700
PG-160SD25	2.5	0-160	0-1100
PG-200SD25	2.5	0-200	0-1400
PG-300SD25	2.5	0-300	0-2100

1/8 M.P.T. CENTER BACK MOUNT

PART No.	Dial	Range	
	(IN.)	(P.S.I.)	(kPa)
PG-30CD15	1.5	0-30	N/A
PG-60CD15	1.5	0-60	N/A
PG-100CD15	1.5	0-100	N/A
PG-160CD15	1.5	0-160	N/A

1/4 M.P.T. CENTER BACK MOUNT

PART No.	Dial	Range	
	(IN.)	(P.S.I.)	(kPa)
PG-30CD2	2	0-30	N/A
PG-60CD2	2	0-60	N/A
PG-100CD2	2	0-100	N/A
PG-160CD2	2	0-160	N/A
PG-200CD2	2	0-200	N/A



H1



DRY PRESSURE GAUGES

- Dry Gauge • Steel Case • Accuracy: 3% -2% -3% • Window: Glass • Connection: Brass • Bourdon Tube
- Operating Temperature: -40°F To +140°F, -40°C To +60°C



VACUUM SERVICE 1/4 M.P.T. STEM MOUNT

PART No.	Dial Dia.	Vacuum	Range (P.S.I.)
PG-30SDV2	2"	30-0 hg	
PG-30V30SD2	2"	30-0 hg	0-30



CO₂ BOTTLE RED ZONE REFILL GAUGE 1/4 M.P.T. STEM MOUNT

- Screw-on Plastic Face
- 0-2000 P.S.I. Range
- 0-500 P.S.I. "Order Gas" Red Zone.

PART No.	Dial Dia.	Description
PG-2000SD2CO2	2"	1/4 M.P.T.
PG-2000SD2CO2L	2"	1/4 M.P.T. Left Hand Thread

TRIDICATOR 1/4 M.P.T. CENTER BACK MOUNT

- Dry Gauge • Steel Case • Accuracy: 3% -2% -3%
- Connection: Brass • Bourdon Tube

- Screw-on Plastic Face

CENTER MOUNT

PART No.	Dial Dia.	Probe Length			Range (P.S.I.)	Range (kPa)
		"A"	"B"	"C"		
PG-75/320TR25	2.5"	0.37"	1.62"	0.50"	0-75	0-500
PG-75/320TR25-1	2.5"	1.43"	1.00"	0.50"	0-75	0-500
PG-75/320TR25-1.6	2.5"	1.43"	1.62"	0.50"	0-75	0-500

Operating Temperature: +60°F to +320°F, +16°C to +160°C


STEM MOUNT

PART No.	Dial Dia.	Probe Length			Range (P.S.I.)	Ft. H ₂ O
		"A"	"B"	"C"		
PG-55/250STR35-D	3.5"	1.14"	2.95"	0.91"	0-55	0-130

Operating Temperature: +70°F to +250°F, +21°C to +121°C

Steel Rimmed ABS

- Other Temperature Ranges Available.

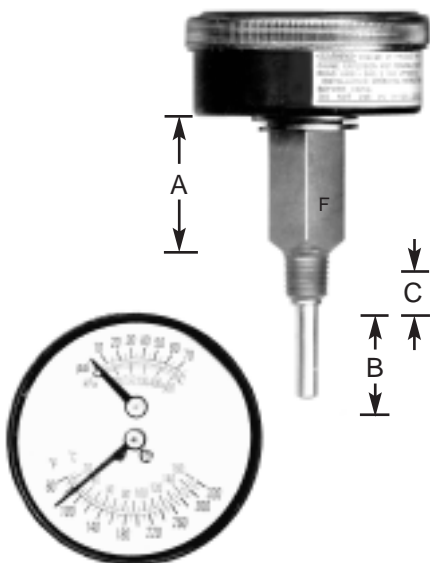

H2

LIQUID FILLED PRESSURE GAUGES



- Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Operating Temperature: - 4°F To + 140°F, -20°C To +60°C



1/4 M.P.T. STEM MOUNT

PART No.	Dial (IN.)	Range	
		(P.S.I.)	(kPa)
PG-15SG25	2.5	0-15	0-100
PG-30SG25	2.5	0-30	0-200
PG-60SG25	2.5	0-60	0-400
PG-100SG25	2.5	0-100	0-700
PG-160SG25	2.5	0-160	0-1100
PG-200SG25	2.5	0-200	0-1400
PG-300SG25	2.5	0-300	0-2100
PG-400SG25	2.5	0-400	0-2800
PG-600SG25	2.5	0-600	0-4000
PG-1000SG25	2.5	0-1000	0-7000
PG-1500SG25	2.5	0-1500	0-10000
PG-2000SG25	2.5	0-2000	0-14000
PG-3000SG25	2.5	0-3000	0-21000
PG-5000SG25	2.5	0-5000	0-35000
PG-10000SG25	2.5	0-10000	0-70000

1/4 M.P.T. STEM MOUNT (4" DIAL)

PART No.	Dial (IN.)	Range	
		(P.S.I.)	(kPa)
PG-30SG4	4	0-30	0-200
PG-60SG4	4	0-60	0-400
PG-100SG4	4	0-100	0-700
PG-160SG4	4	0-160	0-1100
PG-200SG4	4	0-160	0-1400
PG-300SG4	4	0-300	0-2100
PG-1000SG4	4	0-1000	0-7000
PG-1500SG4	4	0-1500	0-10000
PG-3000SG4	4	0-3000	0-21000
PG-5000SG4	4	0-5000	0-35000
PG-10000SG4	4	0-10000	0-70000

1/4 M.P.T. STEM MOUNT (4" DIAL) ALL STAINLESS STEEL (316)

PART No.	Dial (IN.)	Range	
		(P.S.I.)	(kPa)
PG-60SG4SS	4	0-60	0-400
PG-100SG4SS	4	0-100	0-700



1/4 M.P.T. CENTER BACK MOUNT

PART No.	Dial (IN.)	Range	
		(P.S.I.)	(kPa)
PG-15CG25	2.5	0-15	0-100
PG-30CG25	2.5	0-30	0-200
PG-60CG25	2.5	0-60	0-400
PG-100CG25	2.5	0-100	0-700
PG-160CG25	2.5	0-160	0-1100
PG-200CG25	2.5	0-200	0-1400
PG-300CG25	2.5	0-300	0-2100
PG-400CG25	2.5	0-400	0-2800
PG-600CG25	2.5	0-600	0-4000
PG-1000CG25	2.5	0-1000	0-7000
PG-1500CG25	2.5	0-1500	0-10000
PG-2000CG25	2.5	0-2000	0-14000
PG-3000CG25	2.5	0-3000	0-21000
PG-5000CG25	2.5	0-5000	0-35000
PG-10000CG25	2.5	0-10000	0-70000

H3



LIQUID FILLED PRESSURE GAUGES

- Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Operating Temperature: - 4°F To + 140°F, -20°C To + 60°C



2 SCREW U-CLAMP
(For Use With Center Back Or Stem Mount Gauges.)

3 HOLE PANEL MOUNT
(Only For Use With Center Back Mount Gauges.)



PG-SNUBBER

- Brass 1/4" Female x 1/4" Male
- Protects gauges from shock.
- Operating Temperature: - 65°F To + 650°F
- 54°C To + 343°C



PG-RC-25



Install Before Assembly.

1/4 M.P.T. STEM MOUNT WITH FACTORY FLANGE

PART No.	Dial	(P.S.I.)	Range
	(IN.)		(kPa)
PG-30SGRF	4	0-30	N/A
PG-100SGRF	4	0-100	N/A
PG-160SGRF	4	0-160	N/A

VACUUM SERVICE 1/4 M.P.T. STEM MOUNT

PART No.	Dial	Vacuum	Range
	(IN.)		(P.S.I.)
PG-30SGV25	2.5	30-0 hg	
PG-30V30SG25	2.5	30-0 hg	0-30

VACUUM SERVICE 1/4 M.P.T. CENTER BACK MOUNT

PART No.	Dial	Vacuum	Range
	(IN.)		(P.S.I.)
PG-30CGV25	2.5	30-0 hg	
PG-30V30CG25	2.5	30-0 hg	0-30

MOUNTING BRACKETS

PART No.	For Dial	
	(IN.)	Description
PG-MB25	2.5	2 Screw U-Clamp
PG-PM25	2.5	3 Hole Panel Mount

SNUBBER

PART No.	Range	Service
	(P.S.I.)	
PG-SNUBBER *	0-10000	Heavy Oils
PG-SNUBBER-G	0-10000	Air & other Gases
PG-SNUBBER-W *	0-10000	Gasoline, Water, Light Oils

*Conforms to requirements of MIL-D-2940A

GAUGE PROTECTOR COVER

PART No.	For Dial		
	(IN.)	Material	Color
PG-RC25	2.5	Rubber	Blue
PG-RC4	4.0	Rubber	Blue